

# 1. Technical Data Sheet (V7) Automatic model

## Specifications

4-season safety cover that complies with the **AFNOR regulation NF P 90-308 December 2013**



- Manipulation :**
  - Wireless control with maintained contact
  - Wired control with 3 buttons (Ratchet spanner only in case of an electrical failure)

- Power supply :** Rechargeable by 2 solar panels 12v/ 12W/ 0.78Ah of 2 batteries 12V - 5,5 Ah (except indoor pool = on power supply)

- Membrane :** PVC pre-stressed membrane 670 g/m<sup>2</sup>

- Belt :** Polyurethane with stainless steel cables



- Mechanical :** All the metallic parts involved in the security are in anodized aluminium and 316 stainless steel

- Rails :** Anodised aluminium

- Casing :** Polyester powder-coated aluminium, matt finished of RAL colour **7037** (standard)



- Length :** min 2 meters -> max 28 meters

- Width :** min 2 meters -> max 12 meters (depending on the length of the cover)<sup>1</sup>




- Speed :** Closing/opening time : 60 seconds for a length of 13 meters



## Available membrane colours



## Available casing colours

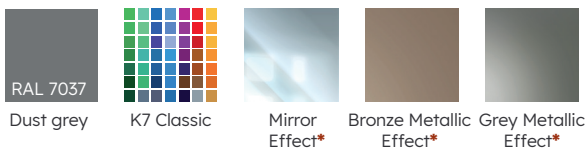

\*Only with lifts  
<sup>1</sup>Except fluorescent and metallic

## Available options

- All-terrain rail (RTT) 72,0 mm x 10,6 mm (unregular surface or low density)
- 2 solar panels additional
- Mechanical closing sensor
- Charging station for indoor pool
- Side Crushing<sup>2</sup>
- Lifts<sup>3</sup> in case of obstacle and low clearance
- «Champagne color rail» (Only standard rail)
- 3 button secondary remote control

## Measures (in mm)

